

SS - Set of two signalling lamps SLS-2 LED


The set of two signalling LED lamps is to be installed on the light arrow with frame.

- > **2 signalling LED lamps** ø200mm **EN 12352 L8H**
- > signalling lamps improve the warning effect of the light arrow

Technical data for consumption refer only to the set of two signalling lamps.

TECHNICAL DATA

Power supply	12/24V=
Current consumption 12V=	day 0,2A night 0,07A
Average consumption 12V=	3,2Ah / 24 hours
Current consumption 24V=	day 0,12A night 0,04A
Average consumption 24V=	1,8Ah / 24 hours
Flashing frequency	60/min.
Dimensions (WxHxL)	1266x206x141mm
Weight	1,8kg

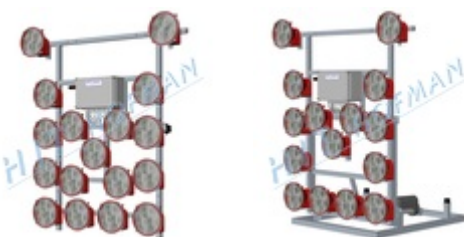

PRODUCTS

Order no.	Product name	Quantity
1-140-905022	SS - Set of two signalling lamps SLS-2 LED	1 pc.

ACCESSORIES

Order no.	Product name	Quantity
1-120-255020	Light arrow SS15 LED with frame	1 pc.
1-120-205020	Light arrow SS13 LED with frame	1 pc.
1-140-455020	Light arrow SS15 LED with frame with motor-operated lifting SD SS-2	1 pc.
1-140-405020	Light arrow SS13 LED with frame with motor-operated lifting SD SS-2	1 pc.